

400-811-0456

SURAPID 速捷电梯

速动未来 捷行天下

Speed Shuttling Future

速捷电梯隶属新西奥电梯集团，是一家集设计、制造、销售、安装和维保一体的现代化专业电梯企业。作为近年成长迅速的民族品牌，速捷电梯已成为中国重要的电扶梯制造商及服务商之一。

SURAPID Elevator Co., Ltd. is a modern professional elevator enterprise with the integration of design, manufacturing, marketing, installation and maintenance. As a national brand with the rapid growth, SURAPID elevator is one of the most important escalator manufacturers and service providers.

传世系列
megaS

浙江速捷电梯有限公司
Zhejiang SURAPID Elevator Co.,Ltd.
Website: www.sjlift.com



新西奥电梯集团
NEW XI'AO ELEVATOR GROUP



精妙绝伦 家居通行新体验

Excellent
New Experiences of Home Transport

速捷平台梯，结构精巧灵活，占地面积小，满足无井道、无底坑建筑的安装需求，融安全、智慧、绿色和高端美学艺术于一体，创造现代家居通行新体验，是平台电梯的不二之选。

The SURAPID platform-type elevator covers a small area, compact and flexible. It is suitable for buildings without wells and pits. It is safe, smart, green and beautiful. Creating new experiences of modern home transport, the SURAPID platform-type elevator is the first choice for you.





停电应急平层

- 停电时自动进入该模式，电梯就近平层开门

Power outage emergency leveling

- In case of power failure, the elevator enters this mode and then moves to the nearest landing before opening the door.

故障自检系统

- 定时对电梯运行状况进行检测分析，第一时间发现潜在问题，防患于未然

Fault Self-examination System

- It regularly inspects and analyzes the running state of the elevator to nip danger in the bud as soon as it finds potential problems.

一键拨号系统

- 智能数据传输通道配合VoIP技术实现一键拨号，采取五个号码轮播方式，避免呼叫占线

One-click Dial System

- It realizes one-click dialing by combining the intelligent data transmission channel with the VoIP technology. It adopts a mode of dialing five numbers in turn to avoid busy lines.

门防夹保护功能

- 门开闭时，如遇堵转，自动反向开启。

Door anti-squeeze protection function

- when eleborator door is opened and closed, it will automatically open in the reverse direction in case of locked-rotor.

安全边框保护

- 平台三面设有安全边框，如遇异物卡滞，电梯即停

Safety Frames

- The platform is equipped with safety frames on three sides. If they are blocked by foreign matters, the elevator stops immediately.

智能终端远程监控 *

- 电梯遇故障时自动报警，智能手机终端与监控中心可实时观测异地电梯的参数及运行状态

Remote Smart Terminal Monitoring*

- If the elevator breaks down, it gives an alarm automatically. Then, smartphones and monitoring centers can monitor the parameters and running states of elevators in other places in real time.

* :选配 optional



舒适平稳 无污染低能耗


Comfortable and Smooth
Pollution-free and Low in Energy Consumption

钢带曳引驱动

- 通过国内外多项质量测试验证,技术领先,性能可靠,电梯传动时钢带、曳引轮、轿底轮无声摩擦,实现低噪运行,乘行更舒适

Tape Traction Drive

- Holding multiple domestic and foreign quality certifications, it features leading technologies and reliable performance. Thanks to the silent friction between tapes, driving sheaves and car bottom sheaves during elevator operation, the elevator runs silently and is more comfortable.

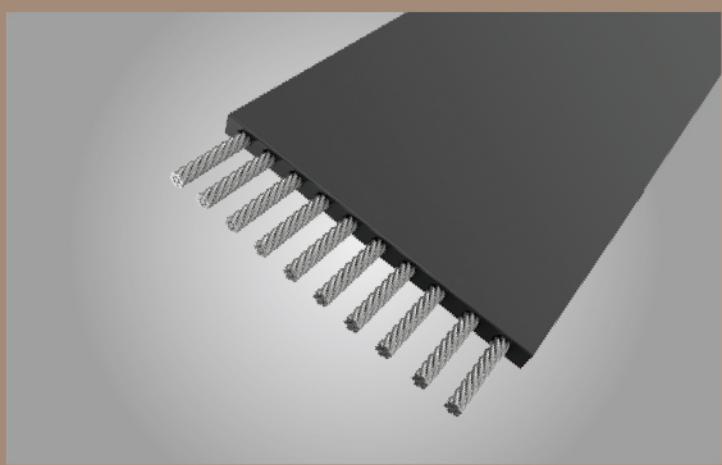

节能控制

- 采用绿色驱动、绿色照明技术,节约能源高达40%,智能化变频控制系统,无人时照明和风扇自动待机,电梯节能运行更持久,成本更低

Energy-saving Control

- It adopts a green drive system and green lighting technologies to save as high as 40% of energy. The intelligent frequency conversion control system puts lamps and fans on standby when there is no passenger. Thanks to energy-saving operation, the elevator is more durable and boasts lower costs.

永磁动力

- 同轴传动技术、数字变频技术和群组电脑组合控制技术充分融合,运行成本小,能量散失低,比一般传统技术可节省能源33%以上,且无齿轮曳引机无需更换油脂,无油渍污染,低噪音

Permanent Magnet Power

- The full combination of coaxial drive, digital frequency conversation and group computer control technologies contributes to low operation costs and energy loss. Compared with traditional technologies, it can save more than 33 percent of energy. Moreover, the gearless traction machine doesn't need to replace grease, causes no oil pollution and boasts low noise.



门及框架系统

Door and Frame System



SJ-MS001 (标配手拉)
SJ-MZ001 (标配自动)

单开门
Single Leaf Door



SJ-MZ003 (选配自动)

中分门
Center Opening Door



SJ-MS002 (选配手拉)
SJ-MZ002 (选配自动)

子母门
Unequal Double Leaf Door

框架井道颜色

Frame and Well Colors



SJ-JS001
深邃灰
Deep Grey



SJ-JS002
瓷炫白
Porcelain White



SJ-JS004
香槟金
Champaign Gold



人机系统

Man-machine System

操纵箱

COP



SJ-CZX-A06
标配操纵箱
Standard control box



SJ-CZX-A02 (选配)
13.3寸智能触摸屏
13.3-inch Intelligent Touch Screen



SJ-CZX-A03 (选配)
10.1寸智能触摸屏 (横式)
10.1-inch Intelligent Touch Screen (Horizontal)



SJ-WH06-B (标配)
圆形触控外呼
Round touch outbound call



SJ-WH06-A (选配)
圆形触控外呼
Round touch outbound call



SJ-WH02 (选配)
长腰型外呼
Long-waist-shaped Call Panel




SJ-WH04 (选配)
触摸屏方外呼
Square Touch Screen Call Panel



SJ-WH03 (选配)
触摸屏圆外呼
Round Touch Screen Call Panel



SJ-WH05 (选配)
触摸屏方外呼
Square Touch Screen Call Panel

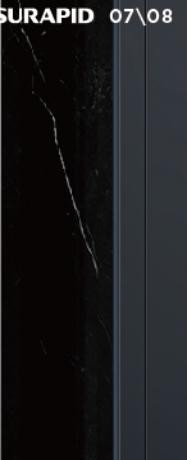

SURAPID 07\08

艺术背板

Artistic Back Panel



SJ-B01 标配
一体式操纵箱+岩板
Integrated control box+rock plate



SJ-B02 选配
触摸屏操纵箱+岩板
Touch Screen Operation Panel+
Sintered Stone



SJ-B01-B 标配
一体式操纵箱+岩板
Integrated control box+rock plate



SJ-B03 选配
木饰面+铝合金边框+触摸屏操纵箱
Wood Veneer+ Aluminum Alloy
Frame+ Touch Screen Operation Panel

吊顶

Ceiling



SJ-D02
暗夜顶 (标配)
Dark Night Ceiling



SJ-D03
星空顶 (选配)
Starry Ceiling

地板


floor



SJ-DBK01 编织地毯 (标配)
Woven Carpet




SJ-DBK04 彩色地板 (标配)
Colorful Flooring



SJ-DBR01 岩板 (选配)
Sintered Stone




SJ-DBK02 木饰面 (选配)




SJ-DBK05 铝合金边框 (选配)




SJ-DBR02 触摸屏操纵箱 (选配)



SJ-DBK03 木饰面 (选配)



SJ-DBK06 铝合金边框 (选配)



SJ-DBR03 触摸屏操纵箱 (选配)

土建参数


Civil engineering parameters



最低顶层高度: 2300mm
Minimum top floor height:
2300mm



最小底坑深度: 60mm
Minimum pit depth:
60mm




最小土建尺寸: 930mm*890mm
Minimum civil engineering size:
930mmx890mm




额定载重量: 250kg
Rated load: 250kg

额定载重量: 400kg
Rated load: 400kg


平台平面图

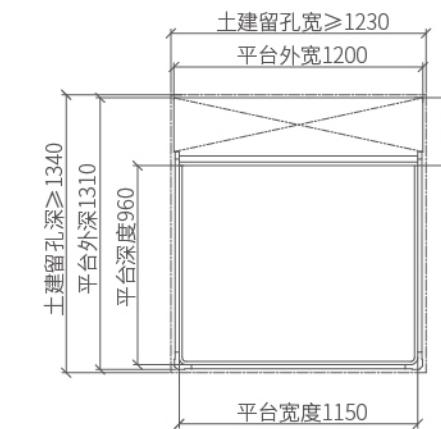

开门平面图

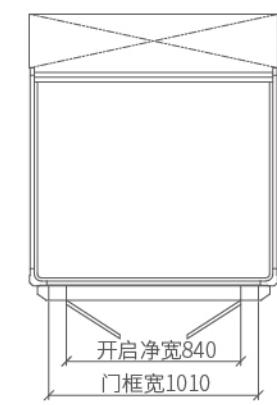


平台平面图

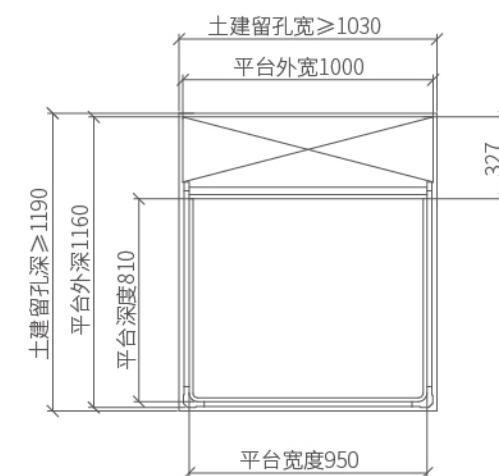


额定载重量: 320kg
Rated load: 320kg


平台平面图

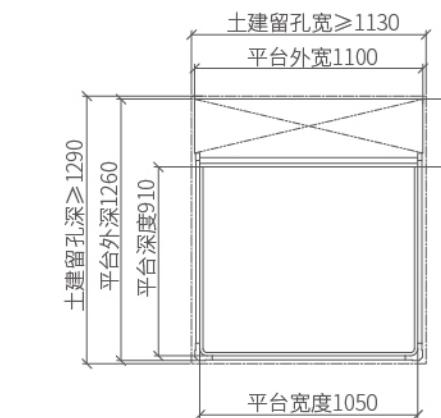

开门平面图

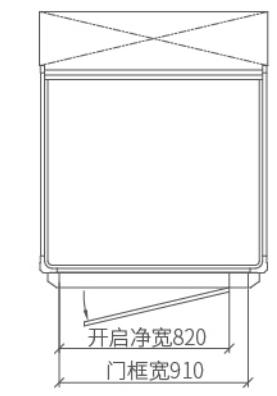


开门平面图

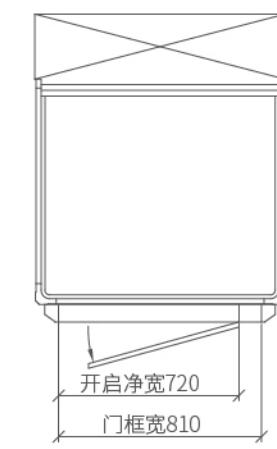

额定载重量: 180kg
Rated load: 180kg

平台平面图

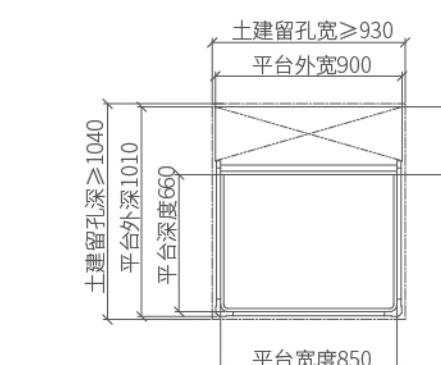

开门平面图